

CEILING ADJUSTABLE SURFACE DOWNLIGHT


KIDO

Suitable for standard surfaced spotlight installation for hotel, restaurant and home lighting.




- 7W 220-240VAC 50/60Hz
- LED adjustable spotlight with recessed installation
- Luminous efficiency 85-100lm/W
- SDCM 3 (MacAdam)
- Flicker free LED driver
- Temperature -15°C +35°C
- Lifespan: 50 000 L80/B50 (Ta=25°C)
- Cover IP20
- Options: TRIAC / DALI
- LED driver with high PF, low THD, small ripple and flicker free as standard option
- Different type of diffusers including prismatic diffuser or honeycomb
- Color temperature range in standard on stock 2700K, 3000K and 4000K, or custom temperature colors from 2200K up to 6500K (on demand)
- High color rendering index over CRI90+ (STANDARD) or CRI80+/CRI95+ (on demand)
- Standard LED COB technology
- Separated high quality driver and LEDs for better heat management and optional service
- Aluminium body for better heat dissipation
- Lamp colors – Matt Black, Matt White (standard), RAL(option)
- Installation accessories - surface


INSTALLATION



REFLECTOR

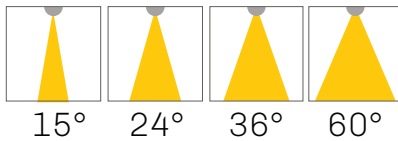

SIZE



MODEL	POWER(W)	LUMENS SYSTEM(lm)	LUMENS SOURCE(lm)
KIDO	7	735*	945*

*3000K CRI90 Ta=25°C SDCM3

ORDER OPTIONS:

When ordering, please fill in the parameters in bracket in this order:

EXAMPLE: KIDO 715 927W

MODEL	POWER	ANGLE	DIMMING	CRI	KELVIN	HOUSING	INSTALLATION
KIDO	7	15	-	9	27	W	-
KIDO (KIDO)	7W (7)	15° (15) 24° (24) 36° (36) 60° (60)	ON/OFF (-) TRIAC (TR) DALI (DA)	CRI 90 (9)	2700K (27) 3000K (30) 4000K (40) 5000K (50)	Matt white(W) Matt black(B) RAL(RALXXX)	Surface (-)