


LED ADJUSTABLE SPOT LIGHT HEDOS

Ideal use for hotel, restaurant, shops, offices and home lighting.




- Power 28-55 W 220-240VAC 50/60 Hz
- Luminous efficiency 85-100 lm/W
- SDCM 3 (MacAdam)
- Flicker free LED driver
- Temperature -15 °C +35 °C
- Lifespan: 50 000 L80/B50 (Ta=25 °C)
- Cover IP20
- Options: ON/OFF/ TRIAC/ DALI/ 1-10V/ ZIGBEE
- LED driver with high PF, low THD, small ripple and flicker free as standard option
- Different type of diffusers including prismatic diffuser UGR19 and wallwasher linear lens
- Color temperature range in standard on stock 2700K, 3000K and 4000K, or custom temperature colors from 2200K up to 6500K (on demand)
- High color rendering index over CRI90+ (STANDARD) or CRI80+/CRI95+ (on demand)
- Standard LED SMD technology
- Neverending line or custom shapes of luminaire system
- Separated high quality driver and LEDs for better heat management and optional service
- Aluminium body for better heat dissipation
- Lamp colors – Matt Black, Matt White (standard), RAL(option)
- Installation accessories - recessed


INSTALLATION



REFLECTOR

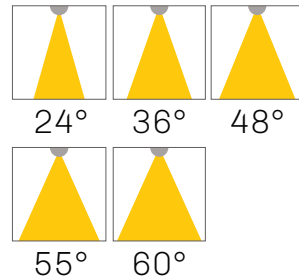

SIZE

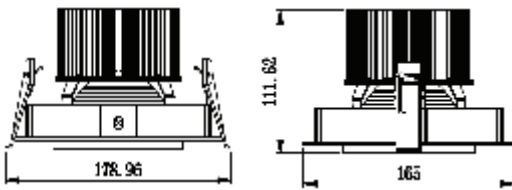

MODEL	POWER(W)	LUMENS SYSTEM(lm)	LUMENS SOURCE(lm)	SIZE(LxWxH) mm
HEDOS 28	28	2940*	3780*	165x165x111,62
HEDOS 37	37	3885*	4995*	165x165x111,62
HEDOS 40	40	4200*	5400*	165x165x111,62
HEDOS 43	43	4515*	5805*	165x165x111,62
HEDOS 50	50	5250*	6750*	165x165x111,62
HEDOS 55	55	5775*	7425*	165x165x111,62

*3000K CRI90 Ta=25°C SDCM3

ORDER OPTIONS:

When ordering, please fill in the parameters in bracket in this order:

EXAMPLE: HEDOS 2824 927 W

MODEL	POWER	ANGLE	DIMMING	CRI	KELVIN	HOUSING	INSTALLATION
HEDOS	28	24	-	9	27	W	-
HEDOS (HEDOS)	28W (28) 37W (37) 40W (40) 43W (43) 50W (50) 55W (55)	24° (24) 36° (36) 48° (48) 55° (55) 60° (60)	ONN/OFF (-) TRIAC (TR) DALI (DA) 0/1-10V (110) ZIGBEE(ZG)	CRI 90(9)	2700K(27) 3000K(30) 4000K(40)	Matt gray(G) Matt black(B) RAL(RALXXXX)	Recessed installation (-)