


LED ADJUSTABLE SPOT LIGHT NYX S/M/L

LED premium line design line for lighting of various interior




- Power 3-19 W 220-240 VAC 50/60Hz
- Luminous efficiency 105 lm/W
- SDCM 3 (MacAdam)
- Flicker free LED driver
- Temperature -15 °C +35 °C
- Lifespan: 50 000 L80/B50 (Ta=25 °C)
- Cover IP20
- Options: ON/OFF/ TRIAC/ DALI/ 1-10V/ ZIGBEE
- LED driver with high PF, low THD, small ripple and flicker free as standard option
- Different type of diffusers including prismatic diffuser UGR19 and wallwasher linear lens
- Color temperature range in standard on stock 2700K, 3000K and 4000K, or custom temperature colors from 2200K up to 6500K (on demand)
- High color rendering index over CRI90+ (STANDARD) or CRI80+/CRI95+ (on demand)
- Standard LED SMD technology
- Neverending line or custom shapes of luminaire system
- Separated high quality driver and LEDs for better heat management and optional service
- Aluminium body for better heat dissipation
- Lamp colors – Matt Black, Matt White (standard), RAL(option)
- Installation accessories - recessed

INSTALLATION




REFLECTOR

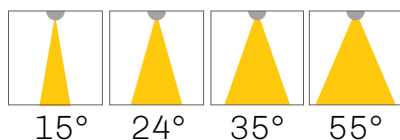


SIZE


NYX L



NYX M

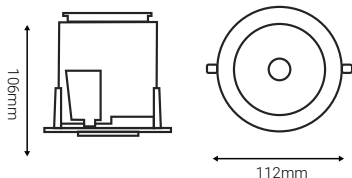

NYX S



MODEL	POWER(W)	LUMENS SYSTEM(lm)	LUMENS SOURCE(lm)
NYX S	3	315*	405*
NYX M	13	1365*	1755*
NYX L	19	1995*	2565*

*3000K CRI90 Ta=25°C SDCM3

ORDER OPTIONS:

When ordering, please fill in the parameters in bracket in this order:

EXAMPLE: NYX S15 927W0

MODEL	TYPE	ANGLE	DIMMING	CRI	KELVIN	HOUSING	GLARE PROTECTION	INSTALLATION
NYX	S	15	-	9	27	W	0	-
NYX (NYX)	66x66x91mm 3W (S)	15° (15)	ONN/OFF (-)	CRI 90(9)	2700K(27)	Matt white(W)	None (-)	Recessed (-)
	112x112x110mm 13W (M)	24° (24)	TRIAC (TR)		3000K(30)	Matt black(B)	Opal (O)	
	140x140x167mm 19W (L)	36° (36)	DALI (DA)		4000K(40)	RAL(RALXXXX)	Prismatic (PS)	
		55° (55)	0/1-10V (110)				Elyptical (EL)	
			ZIGBEE(ZG)				Honeycomb grill (HG)	