


LED MAGNETIC TRACK LIGHT REKTON

Ideal use for hotel, restaurant, shops, offices and home lighting.




- Power 10-50W 220-240VAC 50/60Hz
- Luminous efficiency 105lm/W
- SDCM 3 (MacAdam)
- Flicker free LED driver
- Temperature -15°C +35°C
- Lifespan: 50 000 L80/B50 (Ta=25°C)
- Cover IP20
- Options: ON/OFF/ TRIAC/ DALI/ 1-10V/ ZIGBEE
- LED driver with high PF, low THD, small ripple and flicker free as standard option
- Different type of diffusers including prismatic diffuser UGR19 and wallwasher linear lens
- Color temperature range in standard on stock 2700K, 3000K and 4000K, or custom temperature colors from 2200K up to 6500K (on demand)
- High color rendering index over CRI90+ (STANDARD) or CRI80+/CRI95+ (on demand)
- Standard LED SMD technology
- Neverending line or custom shapes of luminaire system
- Separated high quality driver and LEDs for better heat management and optional service
- Aluminium body for better heat dissipation
- Lamp colors – Matt Black, Matt White (standard), RAL(option)
- Installation accessories - recessed

INSTALLATION



SIZE

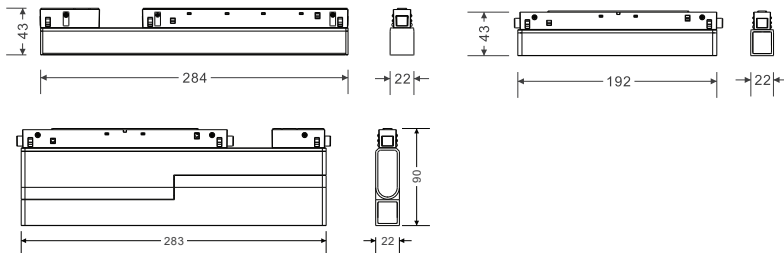

MODEL	WATTS(W)	LUMENS SYSTEM(lm)	LUMENS SOURCE(lm)	SIZE(LxWxH) mm
AD	12	1260*	1620*	284x22x42
28413	13	1365*	1755*	284x22x42
2849	9	945*	1215*	192x22x43
1927	7	735*	945*	192x22x43
1923	3	315*	405*	283x22x90

*3000K CRI90 Ta=25°C SDCM3

ORDER OPTIONS:

When ordering, please fill in the parameters in bracket in this order:

EXAMPLE: REKTON AD20 927W

MODEL	ANGLE	DIMMING	CRI	KELVIN	HOUSING	INSTALLATION
AD	20	-	9	27	W	-
AD 12W (AD)	20° (20)	ONN/OFF (-)	CRI 90(9)	2700K(27)	Matt white(W)	Recessed installation (-)
28413 13W (28413)	35° (35)	TRIAC (TR)		3000K(30)	Matt black(B)	
2849 9W (2849)		DALI (DA)		4000K(40)	RAL(RALXXXX)	
1927 7W (1927)		0/1-10V (110)				
1923 3W (1923)		ZIGBEE(ZG)				