

SELVO DQS

LAMPPIA **tech**


LED SPOT ADJUSTABLE DOWNLIGHT

Suitable for standard recessed spotlight installation for hotel, restaurant and home lighting.




- Power 8-12W 220-240VAC 50/60Hz
- LED surface spotlight
- Luminous efficiency 85-100lm/W
- SDCM 3 (MacAdam)
- Flicker free LED driver
- Temperature -15°C +35°C
- Lifespan: 50 000 L80/B50 (Ta=25°C)
- Cover IP20
- Options: ON/OFF/ TRIAC/ DALI/ 1-10V/ ZIGBEE
- LED driver with high PF, low THD, small ripple and flicker free as standard option
- Different type of diffusers including prismatic diffuser or honeycomb
- Color temperature range in standard on stock 2700K, 3000K and 4000K, or custom temperature colors from 2200K up to 6500K (on demand)
- High color rendering index over CRI90+ (STANDARD) or CRI80+/CRI95+ (on demand)
- Standard LED COB technology
- Separated high quality driver and LEDs for better heat management and optional service
- Aluminium body for better heat dissipation
- Lamp colors – Matt Black, Matt White (standard), RAL(option)
- Installation accessories - recessed


INSTALLATION



REFLECTOR

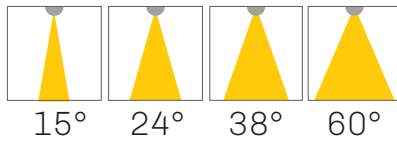

SIZE

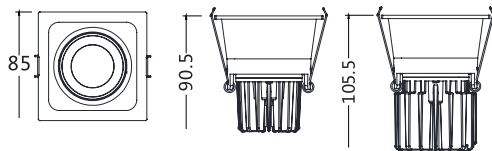

MODEL	WATTS(W)	LUMENS SYSTEM(lm)	SIZE(LxWxH) mm
SELVO DQ S	8	720*	85x85x90,5
SELVO DQ M	12	1080*	85x85x105,5

*3000K CRI90 Ta=25C° SDCM3

ORDER OPTIONS:

When ordering, please fill in the parameters in bracket in this order:

EXAMPLE: SELVO DQS S15 927WH

MODEL	POWER	ANGLE	DIMMING	CRI	KELVIN	HOUSING	GLARE PROTECTION	INSTALLATION
SELVO DQS	S	15	-	9	27	W	H	-
SELVO DQS (SELVO DQS)	S 8W (S) M 12W (M)	15° (15) 24° (24) 38° (38) 60° (60)	ON/OFF (-) TRIAC (TR) DALI (DA) 0/1-10V (110)	CRI 90(9) CRI 80(8)	2700K(27) 3000K(30) 4000K(40)	Matt white(W) Matt black(B) RAL(RALXXXX)	Honeycomb (H) Opal glass (O) Frozen glass (F) Prismatic glass (P) None (-)	Surface (-)