


# LED ADJUSTABLE SPOT DOWNLIGHT GORO

Suitable for standard recessed spotlight installation for hotel, restaurant and home lighting.




- Power 8W-45W 220-240VAC 50/60Hz
- LED adjustable spotlight with recessed installation
- Luminous efficiency 85-100lm/W
- SDCM 3 (MacAdam)
- Flicker free LED driver
- Temperature -15°C +35°C
- Lifespan: 50 000 L80/B50 (Ta=25°C)
- Cover IP20
- Options: ON/OFF/ TRIAC/ DALI/ 1-10V/ ZIGBEE
- LED driver with high PF, low THD, small ripple and flicker free as standard option
- Different type of diffusers including prismatic diffuser or honeycomb
- Color temperature range in standard on stock 2700K, 3000K and 4000K, or custom temperature colors from 2200K up to 6500K (on demand)
- High color rendering index over CRI90+ (STANDARD) or CRI80+/CRI95+ (on demand)
- Standard LED COB technology
- Separated high quality driver and LEDs for better heat management and optional service
- Aluminium body for better heat dissipation
- Lamp colors – Matt Black, Matt White (standard), RAL(option)
- Installation accessories - recessed


## INSTALLATION

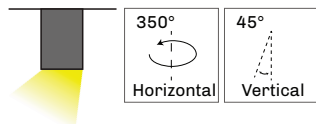

## REFLECTOR

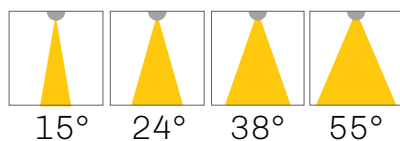

## SIZE

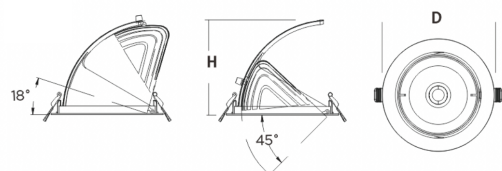

MODEL	POWER(W)	LUMENS SYSTEM(lm)	LUMENS SOURCE(lm)
GORO XS	8	840*	1080*
GORO S	12	1260*	1620*
GORO M	20	2100*	2700*
GORO L	30	3150*	4050*
GORO XL	35	3675*	4725*
GORO XXL	45	4725*	6075*

\*3000K CRI90 Ta=25°C SDCM3

## ORDER OPTIONS:

When ordering, please fill in the parameters in bracket in this order:

### EXAMPLE: GORO S15 927W

MODEL	TYPE	ANGLE	DIMMING	CRI	KELVIN	HOUSING	ACCESORIES	INSTALLATION
GORO	S	15	-	9	27	W	-	-
GORO (GORO)	90x60mm 8W (XS) 102x80mm 12W (S) 125x110mm 20W(M) 140x115mm 30W (L) 160x135mm 35W (XL) 190x175mm 45W (XXL)	15° (15) 24° (24) 38° (38) 60° (60)	ON/OFF (-) TRIAC (TR) DALI (DA) 0/1-10V (110)	CRI 90 (9)	2700K(27) 3000K(30) 4000K(40)	Matt white(W) Matt black(B) RAL(RALXXXX)	Honeycomb (H) Opal glass (O) Frozen glass (F) Prismatic glass (P) None (-)	Recessed (-)