


CEILING SPOTLIGHT FAREO SR

Suitable for ceiling spotlight installation for hotel, restaurant and home lighting.



- Power 10-50 W 220-240 VAC 50/60Hz
- Luminous efficiency 85-100 lm/W
- SDCM 3 (MacAdam)
- Flicker free LED driver
- Temperature -15 °C +35 °C
- Lifespan: 50 000 L80/B50 (Ta=25 °C)
- Cover: IP20
- Options: ON/OFF/ TRIAC/ DALI/ KNOB / CASAMBI
- LED driver with high PF, low THD, small ripple and flicker free as standard option
- Different type of diffusers including prismatic diffuser UGR19 and wallwasher linear lens
- Color temperature range in standard on stock 2700K, 3000K and 4000K, or custom temperature colors from 2200K up to 6500K (on demand)
- High color rendering index over CRI90+ (STANDARD) or CRI80+/CRI95+ (on demand)
- Standard LED SMD technology
- Neverending line or custom shapes of luminaire system
- Separated high quality driver and LEDs for better heat management and optional service
- Aluminium body for better heat dissipation
- Lamp colors – Matt Black, Matt White (standard), RAL(option)
- Installation accessories - surface, pendant

INSTALLATION

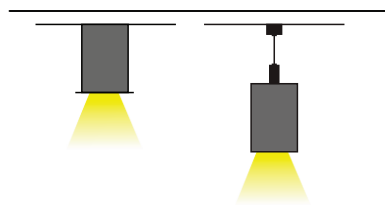


REFLECTOR



60°

SIZE



MODEL	POWER(W)	LUMENS SYSTEM(lm)	LUMENS SOURCE(lm)	SIZE(DxH) mm
FAREO XS	10	1000	1300	75x100
FAREO S	15	1500	1950	75x152
FAREO SX	15	1500	1950	75x100
FAREO M	20	2000	2600	95x152
FAREO L	30	3000	3900	115x152
FAREO XL	40	4000	5200	140x162
FAREO XXL	50	5000	6500	170x182
FAREO XXLX	50	5000	6500	205x212

ORDER OPTIONS:

When ordering, please fill in the parameters in bracket in this order:

EXAMPLE: FAREO SRXS60 927WS

MODEL	TYPE	ANGLE	DIMMING	CRI	KELVIN	HOUSING	INSTALLATION
FAREO SR	XS	60	-	9	27	W	S
FAREO SR (FAREO SR)	XS 10W (XS) S 15W (S) SX 15W (MX) M 20W (M) L 30W (L) XL40W (XL) XXL 50W (XXL) XXLX 50W (XXLX)	60° (60)	ONN/OFF (-) DALI (DL) TRIAC (TR) KNOB (K) CASAMBI (CS)	CRI 90(9)	2700K(27) 3000K(30) 4000K(40)	Matt white(W) Matt black(B) RAL(RALXXXX)	Surface (S) Pendant (P)