


# LED SPOT LIGHT NEKAR

Ideal use for hotel, restaurant, shops, offices and home lighting.




- Power 8-28 W 220-240VAC 50/60 Hz
- Luminous efficiency 110 lm/W
- SDCM 3 (MacAdam)
- Flicker free LED driver
- Temperature -15 °C +35 °C
- Lifespan: 50 000 L80/B50 (Ta=25 °C)
- Cover IP20
- Options: ON/OFF/ TRIAC/ DALI/ 1-10V/ ZIGBEE
- LED driver with high PF, low THD, small ripple and flicker free as standard option
- Different type of diffusers including prismatic diffuser UGR19 and wallwasher linear lens
- Color temperature range in standard on stock 2700K, 3000K and 4000K, or custom temperature colors from 2200K up to 6500K (on demand)
- High color rendering index over CRI90+ (STANDARD) or CRI80+/CRI95+ (on demand)
- Standard LED SMD technology
- Neverending line or custom shapes of luminaire system
- Separated high quality driver and LEDs for better heat management and optional service
- Aluminium body for better heat dissipation
- Lamp colors – Matt Black, Matt White (standard), RAL(option)
- Installation accessories - recessed


## INSTALLATION



## REFLECTOR

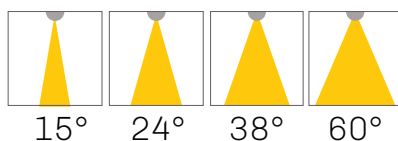

## SIZE



MODEL	POWER(W)	LUMENS SYSTEM(lm)	LUMENS SOURCE(lm)	SIZE(ØxH) mm
NEKAR 8	8	650*	880*	65x76
NEKAR 10	10	850*	1100*	85x74
NEKAR 15	15	1275*	1650*	85x94
NEKAR 28	28	2380*	3080*	105x120

\*3000K CRI90 Ta=25°C SDCM3

## ORDER OPTIONS:

When ordering, please fill in the parameters in bracket in this order:

### EXAMPLE: NEKAR S15 827W

MODEL	POWER	ANGLE	DIMMING	CRI	KELVIN	HOUSING	INSTALLATION
NEKAR	S	15	-	8	27	W	-
NEKAR (NEKAR)	8W (S) 10W (M) 15W (L) 28W (XL)	15° (15) 24° (24) 38° (38) 60° (60)	ONN/OFF (-) TRIAC (TR) DALI (DA) 0/1-10V (110) ZIGBEE(ZG)	CRI 80(8)	2700K(27) 3000K(30) 4000K(40)	White(W) Black(B) RAL(RALXXXX)	Recessed installation (-)