


CEILING SURFACE SPOTLIGHT STROBO

Ideal use for hotel, restaurant, shops, offices and home lighting.




- Power 10-60W 220-240VAC 50/60Hz
- LED surface spotlight
- Luminous efficiency 85-100lm/W
- SDCM 3 (MacAdam)
- Flicker free LED driver
- Temperature -15°C +35°C
- Lifespan: 50 000 L80/B50 (Ta=25°C)
- Cover IP20
- Options: ON/OFF/ TRIAC/ DALI/ 1-10V/ ZIGBEE
- LED driver with high PF, low THD, small ripple and flicker free as standard option
- Different type of diffusers including prismatic diffuser or honeycomb
- Color temperature range in standard on stock 2700K, 3000K and 4000K, or custom temperature colors from 2200K up to 6500K (on demand)
- High color rendering index over CRI90+ (STANDARD) or CRI80+/CRI95+ (on demand)
- Standard LED COB technology
- Separated high quality driver and LEDs for better heat management and optional service
- Aluminium body for better heat dissipation
- Lamp colors – Matt Black, Matt White (standard), RAL(option)


INSTALLATION

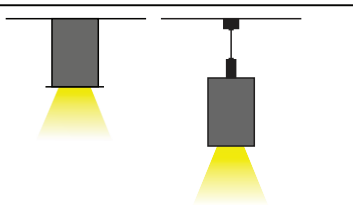

REFLECTOR

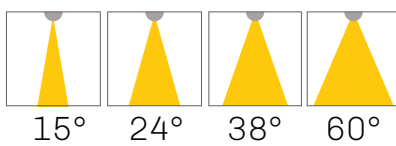

SIZE



MODEL	WATTS W	LUMENS lm	SIZE(DxH) mm
STROBO XS	10	1040*	74x147
STROBO S	18	1890*	97x152
STROBO M	25	2620*	115x135
STROBO L	35	3675*	140x160
STROBO XL	50	5250*	171x198
STROBO XXL	60	6300*	186x214

*3000K CRI90 Ta=25°C SDCM3

ORDER OPTIONS:

When ordering, please fill in the parameters in bracket in this order:

EXAMPLE: STROBO XS15 927H

MODEL	TYPE	ANGLE	DIMMING	CRI	KELVIN	HOUSING	GLARE PROTECTION	INSTALLATION
STROBO	XS	15	-	9	27	W	H	S
STROBO (STROBO)	XS 10W (XS)	15° (15)	ONN/OFF (-)	CRI 90(9)	2700K(27)	Matt white(W)	Honeycomb (H)	Surface (S)
	S 18W (S)	24° (24)	DALI (DL)	CRI 80(8)	3000K(30)	Matt black(B)	Opal glass (O)	Pendant (P)
	M 25W (M)	38° (38)	TRIAC (TR)		4000K(40)	RAL(RALXXXX)	Frozen glass (F)	
	L 35W (L)	60° (60)	KNOB (K)				Prismatic glass (P)	
	XL 50W (XL)		CASAMBI (CS)					
	XXL 60W (XXL)							