

LED PENDANT LOW GLARE SPOTLIGHT


Minimalist technical pendant design spotlight for hotel, restaurant and home lighting




- Power 3-5W 12VDC / 220-240VAC 50/60Hz
- LED minimalist pendant spotlight
- Super low glare for light version with lenses
- Small UGR
- Luminous efficiency 85-100lm/W
- SDCM 3 (MacAdam)
- Flicker free LED driver for 230VAC version
- Temperature Ta -15°C +35°C
- Lifespan: 50 000 L80/B50 (Ta=25°C)
- Cover IP20
- Options: ON/OFF/ TRIAC/ DALI
- LED driver with high PF, low THD, small ripple and flicker free as standard option
- Different type of lenses and optic solution
- Color temperature range in standard on stock 2700K, 3000K and 4000K, or custom temperature colors from 2200K up to 6500K (on demand)
- High color rendering index over CRI90+
- Separated high quality driver and LEDs for better heat management and optional service
- Aluminium heatsink for better heat dissipation
- Lamp colors – Black Metal, Brushed brass, Silver

INSTALLATION


PENDANT



SIZE

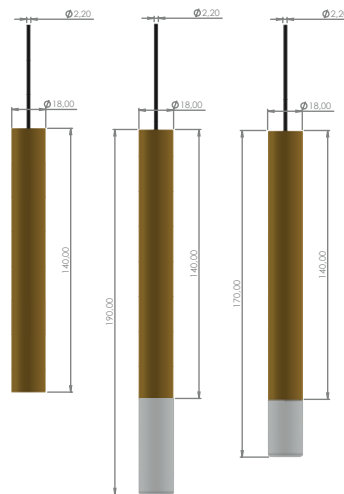

PHOTOMETRY

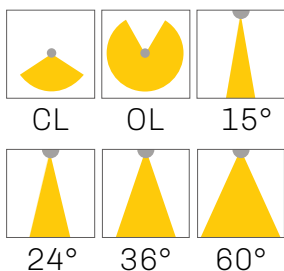

MODEL TYPE	POWER (W)	LUMENS SYSTEM(lm)	LUMENS SOURCE(lm)
TINIS 3W	3W	255	390
TINIS 5W	5W	425	650

*3000K CRI90 Ta=25 C° SDCM3

ORDER OPTIONS:

When ordering, please fill in the parameters in bracket in this order:

EXAMPLE: TINIS 5DC15 927 BBP

MODEL	POWER	ANGLE	DIMMING	CRI	KELVIN	HOUSING	INSTALLATION
TINIS	5DC	15	-	9	27	BB	P
TINIS (TINIS)	5W 12VDC (5DC)	15° (15)	ON/OFF (-)	CRI 90 (9)	2700K (27)	Brushed brass (BB)	Pendant (P)
	3W 12VDC (3DC)	24° (24)	TRIAC 230VAC (TRAC)		3000K (30)	Black Metal (BM)	
	5W 230VAC (5AC)	36° (36)	DALI 230VAC (DAAC)		4000K (40)	Silver (S)	
	3W 230VAC (3AC)	60° (60)			5000K (50)		
		OPAL TUBE LENS 330° (OL)					
		CLEAR TUBE LENS 120° (CL)					